


FB090/092 标准公制轴承 Metric Standard Bushing

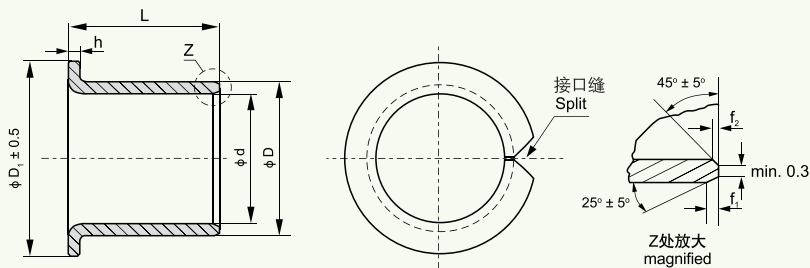

※标准直套标注方式: Standard Bushing Label Mode SF-4 □ 1010

单位Unit: mm

型号 Type	内径 φ d	外径 φ D	法兰外径 φ D ₁ ± 0.5	法兰壁厚 h ₀ ⁰ _{-0.20}	高度 L ± 0.25	f ₁	f ₂	相配轴径 Axle		相配座孔 Housing	
FB □F 2520	25	28	35	1.5	20	0.8	0.4	25	-0.020 -0.041	28	+0.021 0
FB □F 2525					25						
FB □F 3020	30	34	45	2.0	20	1.2	0.6		-0.020 -0.041	34	+0.025 0
FB □F 3025					25						
FB □F 3030					30						
FB □F 3530	35	39	50		30				-0.025 -0.050	39	+0.025 0
FB □F 3540					40						
FB □F 3550					50						
FB □F 4030					30						
FB □F 4040	40	44	55		40				-0.025 -0.050	44	+0.025 0
FB □F 4050					50						
FB □F 5030	50	55	65	2.5	30	1.6	0.8		-0.025 -0.050	55	+0.030 0
FB □F 5040					40						
FB □F 5050					50						
FB □F 5530	55	60	70		30				-0.030 -0.060	60	+0.030 0
FB □F 5540					40						
FB □F 5550					50						
FB □F 6040					40						
FB □F 6050	60	65	75		50				-0.030 -0.060	65	+0.030 0
FB □F 6060					60						
FB □F 8050	80	85	100		50				-0.030 -0.060	85	+0.035 0
FB □F 8060					60						
FB □F 8080					80						
FB □F 10050	100	105	120		50				-0.036 -0.071	105	+0.035 0
FB □F 10060					60						
FB □F 10080					80						
FB □F 16060	160	165	190		60				-0.043 -0.083	165	+0.040 0
FB □F 16080					80						
FB □F 20060	200	205	235		60				-0.050 -0.096	205	+0.046 0
FB □F 20080					80						